

Gewindeformer für UNC-Gewinde



P	•
M	•
K	•
N	○
S	•
H	•

Schneidstoff **HSS-E-PM**



Ø-Toleranz 2BX

Oberfläche **C**

Typ N

Form C

Innenkühlung

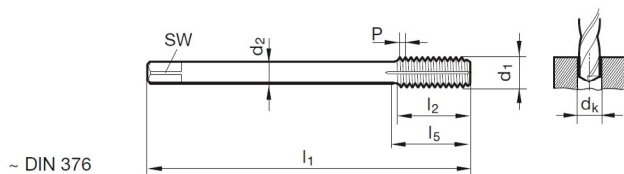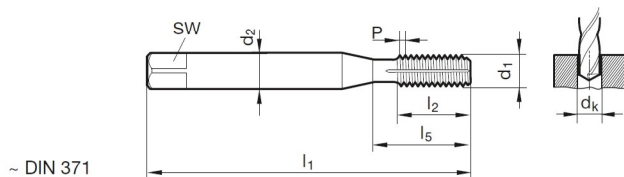

DIN 2184-1 ~DIN 371/~DIN 376

Artikel-Nr.

4491

Rabattgruppe

208

d1	d2	SW	dk	l1	l2	l5	Code-Nr.
	mm	mm	mm	mm	mm	mm	
4 - 40	3,500	2,700	2,55	56,000	11,000	18,000	2,845
6 - 32	4,000	3,000	3,15	56,000	12,000	20,000	3,505
8 - 32	4,500	3,400	3,80	63,000	12,000	21,000	4,166
10 - 24	6,000	4,900	4,35	70,000	14,000	25,000	4,826
12 - 24	6,000	4,900	5,00	80,000	16,000	30,000	5,486
1/4 - 20	7,000	5,500	5,75	80,000	16,000	30,000	6,350
5/16 - 18	8,000	6,200	7,30	90,000	18,000	35,000	7,938
3/8 - 16	10,000	8,000	8,80	90,000	20,000	35,000	9,525
7/16 - 14	8,000	6,200	10,30	100,000	22,000	42,000	11,113
1/2 - 13	9,000	7,000	11,80	100,000	25,000	40,000	12,700
9/16 - 12	11,000	9,000	13,30	100,000	28,000	40,000	14,288
5/8 - 11	12,000	9,000	14,80	100,000	30,000	44,000	15,875
3/4 - 10	14,000	11,000	17,90	110,000	33,000	44,000	19,050