



Mikro-Gewindefräser



P	○
M	●
K	●
N	●
S	●
H	●

für die Hartbearbeitung bis 66 HRC • Linkslauf M4

Schneidstoff	VHM
Oberfläche	A
Typ	MTMH3 SP
Innenkühlung	☒
Schaftform	HA

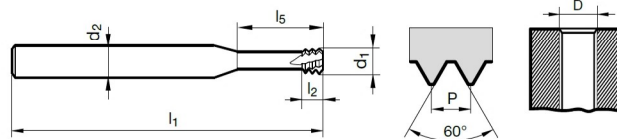

Werksnorm

Artikel-Nr.

4496

Rabattgruppe

108

D	P	d1	d2	l1	l2	l5	Z	Code-Nr.
	mm	mm	mm	mm	mm	mm		
M2	0,400	1,550	3,000	39,000	1,200	5,000	4	2,000
M2,5	0,450	1,950	3,000	39,000	1,400	6,500	4	2,500
M3	0,500	2,350	6,000	58,000	1,500	7,500	4	3,000
M3,5	0,600	2,800	6,000	58,000	1,800	9,000	4	3,500
M4	0,700	3,100	6,000	58,000	2,100	10,000	4	4,000
M5	0,800	3,800	6,000	58,000	2,400	12,500	4	5,000
M6	1,000	4,800	6,000	58,000	3,000	15,000	4	6,000
M8	1,250	5,950	6,000	58,000	3,800	20,000	5	8,000
M10	1,500	7,800	8,000	64,000	4,500	25,000	5	10,000
M12	1,750	9,000	10,000	73,000	5,300	30,000	6	12,000
M16	2,000	11,800	12,000	84,000	6,000	35,000	6	16,000